


Mini RG59 Coax Cable

Mini RGB Coax 3-Bundled Cable

- Swept test to 3.0 GHz

Specifications:

- Coax Type: Mini RG59/U
- Gauge: 23 AWG
- Center Conductor: Solid Bare Copper
- Dielectric: 0.102" Gas Foam PE
- Shield: 100% Bonded Al-Poly Film Overlap
- Braid: 95% Coverage Tin Copper
- Central Conductor DC Resistance: 20.1 Ohm, 1000 ft.
- Conductor Colors: Blue, Red, Green
- Shield DC Resistance: 7.6 Ohm, 1000 ft.
- Impedance: 75 Ohm, +/- 3
- Velocity of Propagation: 83%
- Operation Temp: - 30 Degrees C to 75 Degrees C
- Jacket: 0.159 mm Flame Retardant PVC Jacket, 4 mm
- Outer Jacket: 3-Bundle: 0.42" Flame Retardant PVC, 9.5 mm
- Color: Black
- UL Listed, CM Rated
- Packaging: Spool
- Weight: 24 lbs





Product No.	Color	Length	Pkg.
MINI-RGB3X	Black	250 ft	Spool

Mini RGB Coax 5-Bundled Cable

- Swept test to 3.0 GHz

Specifications:

- Coax Type: Mini RG59/U
- Gauge: 23 AWG
- Center Conductor: Solid Bare Copper
- Dielectric: 0.102" Gas Foam PE
- Shield: 100% Bonded Al-Poly Film Overlap
- Braid: 95% Coverage Tin Copper
- Central Conductor DC Resistance: 20.1 Ohm, 1000 ft.
- Conductor Colors: Blue, Red, Green, White, Black
- Shield DC Resistance: 7.6 Ohm, 1000 ft.
- Impedance: 75 Ohm, +/- 3
- Velocity of Propagation: 83%
- Operation Temp: - 30 Degrees C to 75 Degrees C
- Jacket: 0.159 mm Flame Retardant PVC Jacket, 4 mm
- Outer Jacket: 5-Bundle: 0.55" Flame Retardant PVC, 15 mm
- Color: Black
- UL Listed, CM Rated
- Packaging: Spool
- Weight: 35 lbs

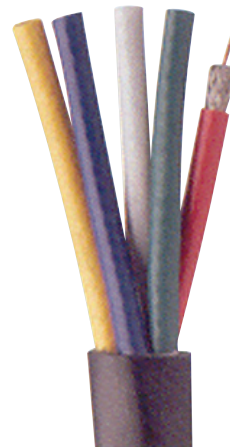

Product No.	Color	Length	Pkg.
MINI-RGB5X	Black	250 ft	Spool



VANCO SALES 1-800-626-6445

Fax Orders 1-630-879-9189 • Visit Our Website at www.Vanco1.com • 506 Kingsland Dr., Batavia, IL 60510